




บริษัท ดูเวลล์ อินเตอร์เทรด จำกัด  
Duwell Intertrade Company Limited

สำนักงานใหญ่: 50 ซอยพัฒนาการ 57 แขวงประเวศ เขตประเวศ กรุงเทพฯ 10250  
Head Office: 50 Soi Pattanakarn 57, Prawet, Prawet, Bangkok 10250  
Tel. 02 722 0996-7 Fax: 02 722 0995  
E-mail: info.duwell@gmail.com, www.duwellintertrade.com  
ทะเบียนนิติบุคคล/เลขประจำตัวผู้เสียภาษีอากร: 0105537132604

## Portable Digital Densitometer DT-100

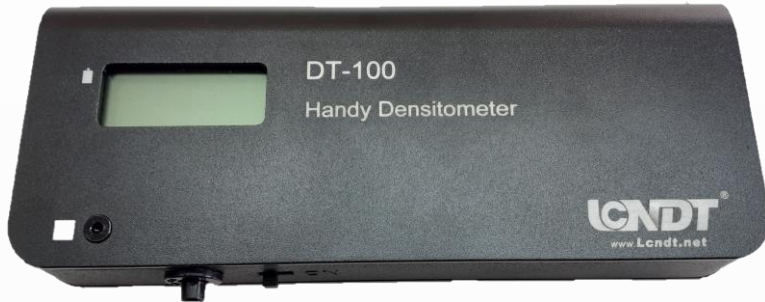

### Characteristic:

Handy portable type densitometer  
High Accuracy  $\pm 0.03 D$   
No warm-up time  
Program Mode for custom calibration  
Extremely wide light range of between  $650 \text{ Cd/m}^2$  and  $320\,000 \text{ Cd/m}^2$   
Light illuminated 4 digit LCD display with low battery indicator  
Long life due to its low power consumption  
Rugged design, whole alloy aluminium  
USB connect to PC for calibration - New Added



### Contact us



083-9929496 (Patcharin)  
087-2887400 (Sureerut)



patcharin2006@gmail.com  
info.duwell@gmail.com



Line : oh3200810



**บริษัท ดูเวลล์ อินเตอร์เทรด จำกัด**  
**Duwell Intertrade Company Limited**


สำนักงานใหญ่: 50 ซอยพัฒนาการ 57 แขวงประเวศ เขตประเวศ กรุงเทพฯ 10250  
 Head Office: 50 Soi Pattanakarn 57, Prawet, Prawet, Bangkok 10250  
 Tel. 02 722 0996-7 Fax: 02 722 0995  
 E-mail: info.duwell@gmail.com, www.duwellintertrade.com  
 ทะเบียนนิติบุคคล/เลขประจำตัวผู้เสียภาษีอากร: 0105537132604

**Technical Specifications:**


Range: 650Cd/m<sup>2</sup> -320 000 Cd/m<sup>2</sup>  
 (5000Lux - 1000 000Lux)  
 Density: 0.00-5.00 D\*  
 \* We strongly suggest DT-100 work with FV series LED viewers.

Optical Aperture: 3mm diameter  
 Probe Temperature compensated  
 Display: 4 digit LCD  
 Accuracy: ±0.03 D  
 Resolution: 0.01D  
 Repeatability: 0.02D  
 Custom calibration range:-0.19 ~ +0.19D  
 (Program Mode)  
 Detector: Silicon photodiode  
 Power supply: (AA/1.5V)x2-Alkaline Battery  
 Battery life: 1200 hours  
 (Continuous duty, without illuminated)  
 Dimensions: 160mm x 65mm x 23mm  
 Weight: 260g

**Data for reference:**

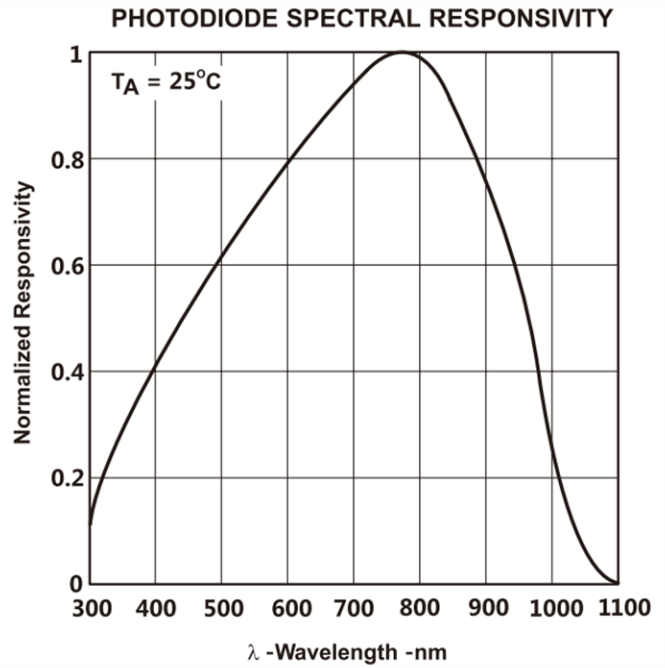

**PC Utility interface (use USB cable connect with PC) :**

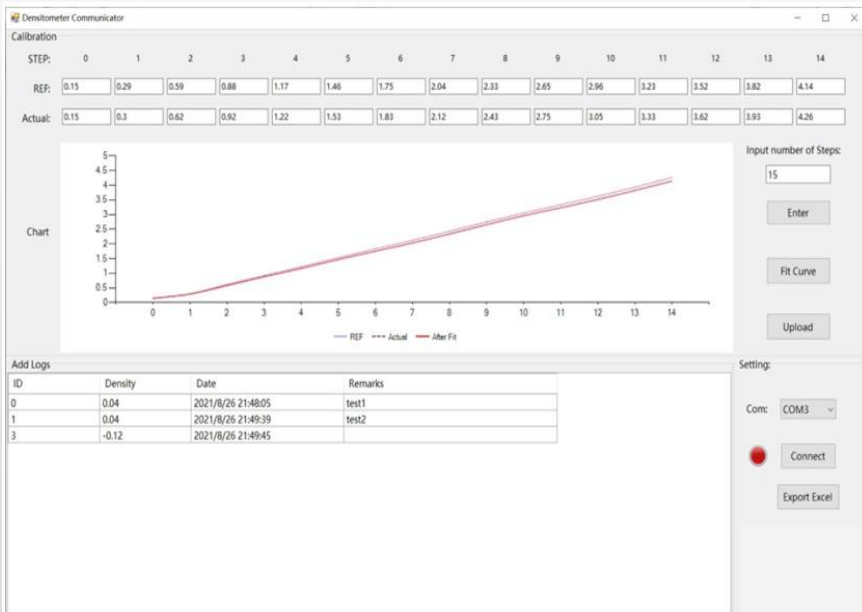

**Standard Components:**

- Main unit: 1
- Micro USB CABLE(1M): 1
- Alkaline Battery: -
- Instruction manual (English): 1
- Test Report(English): 1
- Leather Bag: 1

**Optional Components:**

AGFA Density Strip, 15-step, certified

**Contact us**



083-9929496 (Patcharin)  
 087-2887400 (Sureerut)



patcharin2006@gmail.com  
 info.duwell@gmail.com



Line : oh3200810

You can easily recalibrate your DT-100 with this utility, it fit to any density strips available in market.

\*Support Win7/Win8/Win10 X86/X64 and higher